


SAEclimber E 15 (1.500 KG)




Light Square
Mast
Section



Passenger &
Material Hoist
E 15

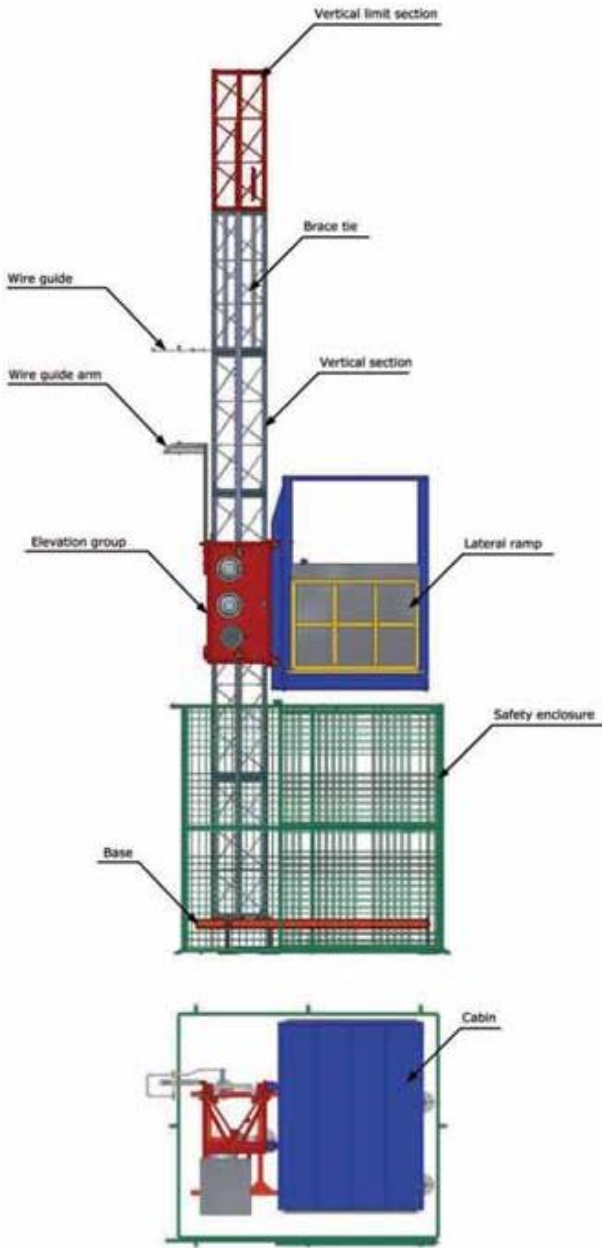

Possibility of left or right cage.

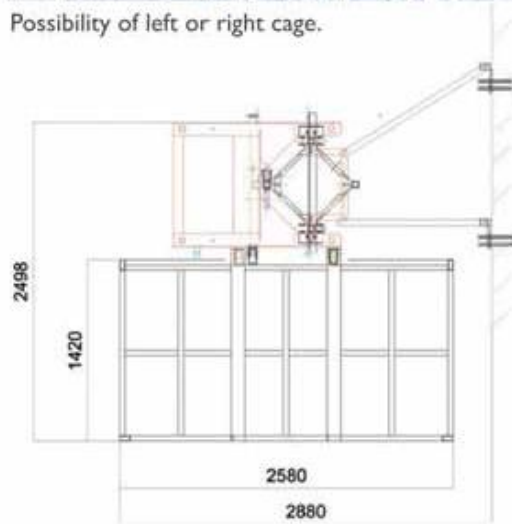

KASIRGA KULE VİNC
İNŞ. İŞ MAK. SAN. VE DİŞ TİC. LTD. ŞTİ.
İçmeler Mah. Yılmaz Sok. No:1 Eşiyok İş Merkezi 2
Kat: 4 Ofis:15 Tuzla / İstanbul
Tel: +90 216 507 25 32 - 33 Fax: +90 216 507 27 23
www.kasirgakulevinc.com www.discepheplatformu.com



SAEclimber
DİŞ CEPHE ASANSÖRLERİ | DİŞ CEPHE PLATFORMLARI
TÜRKİYE DİSTRİBÜTÖRÜ



Passenger & Material Hoist E 15

Compatible with Mast climbing
work platform SPM 4016 and
Mat. hoist /Transp. Platf. PH 15



General Data

- Hot clip galvanised structural elements for a long duration
- Safety Limit Switches for detection of mast presence
- Safety Limit Switches for emergency brake, top and bottom controls and overrun.
- Ground Enclosure with door's limit switches.
- Phase control and over charge electrical protection.
- Emergency centrifugal safety brake.
- Terminal mast section with interrupted rack to avoid cabin overrun.
- Electromechanical interlock of doors and ramps.

Technical Data

• Max height	150 m(*)
• Max free stancling height	6 m
• Wall ties distance	6 m
• Max payload	1500 Kg
• Cage dimensions	2.0 (3.0) m L X 1.3 mW X 2.1 m H
• Elevation speed	24m/min or 36 m/min. (**)
• Max allowable wind speed in operation (with tower wall tied)	72 Km/h
• Max allowable wind speed during erection	45 Km/h
• Power supply	380 V - 50 Hz - 3 phase (*)
• Motors	2 X 7.5 Kw or 2 x 9.2 Kw (**)
• Mast section weight	75 Kg
• Mast section height	1.5 m

(**) with Inverter as standart

(*) Other values on request.

NOTE: SAE reserves the right to change any of the written specification without notice.